



Router\_A

- IAC Bremen
- 4 US trips in
- Embedded
- DASIA

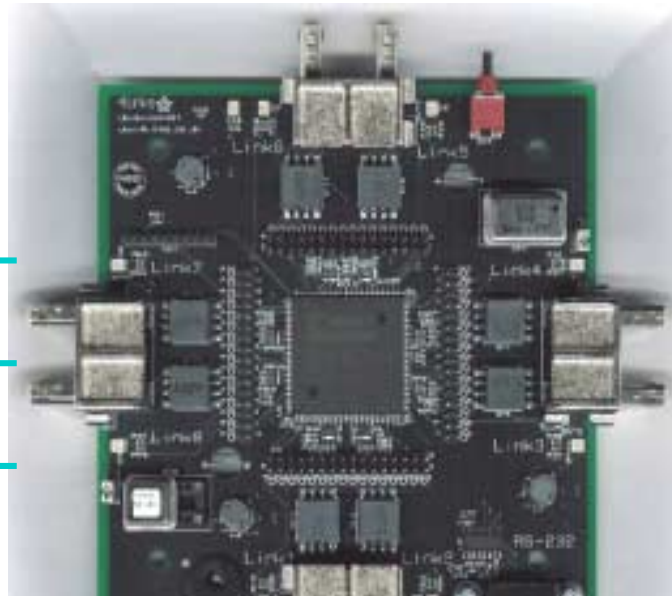


Integrating a new  
orbiting  
backscatter from  
DSP processors to  
wire for the  
synchronization.

Working out algorithms,  
since the DSP  
or "support  
information from the  
SpaceWirePCI

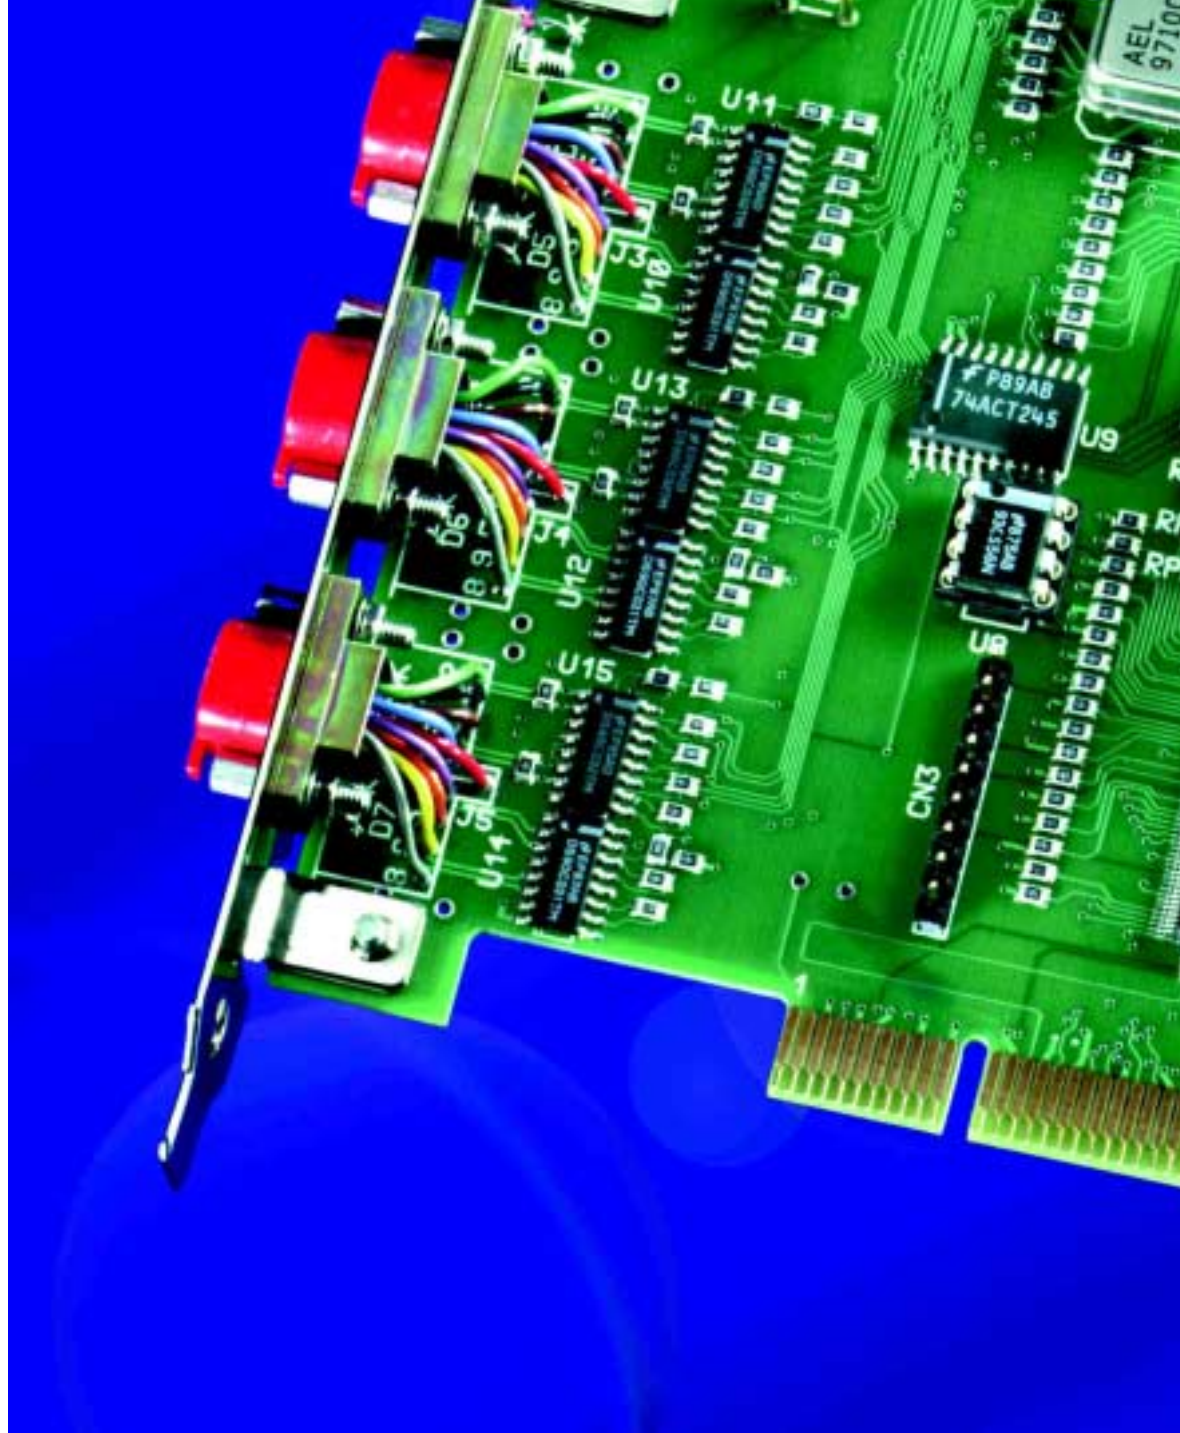



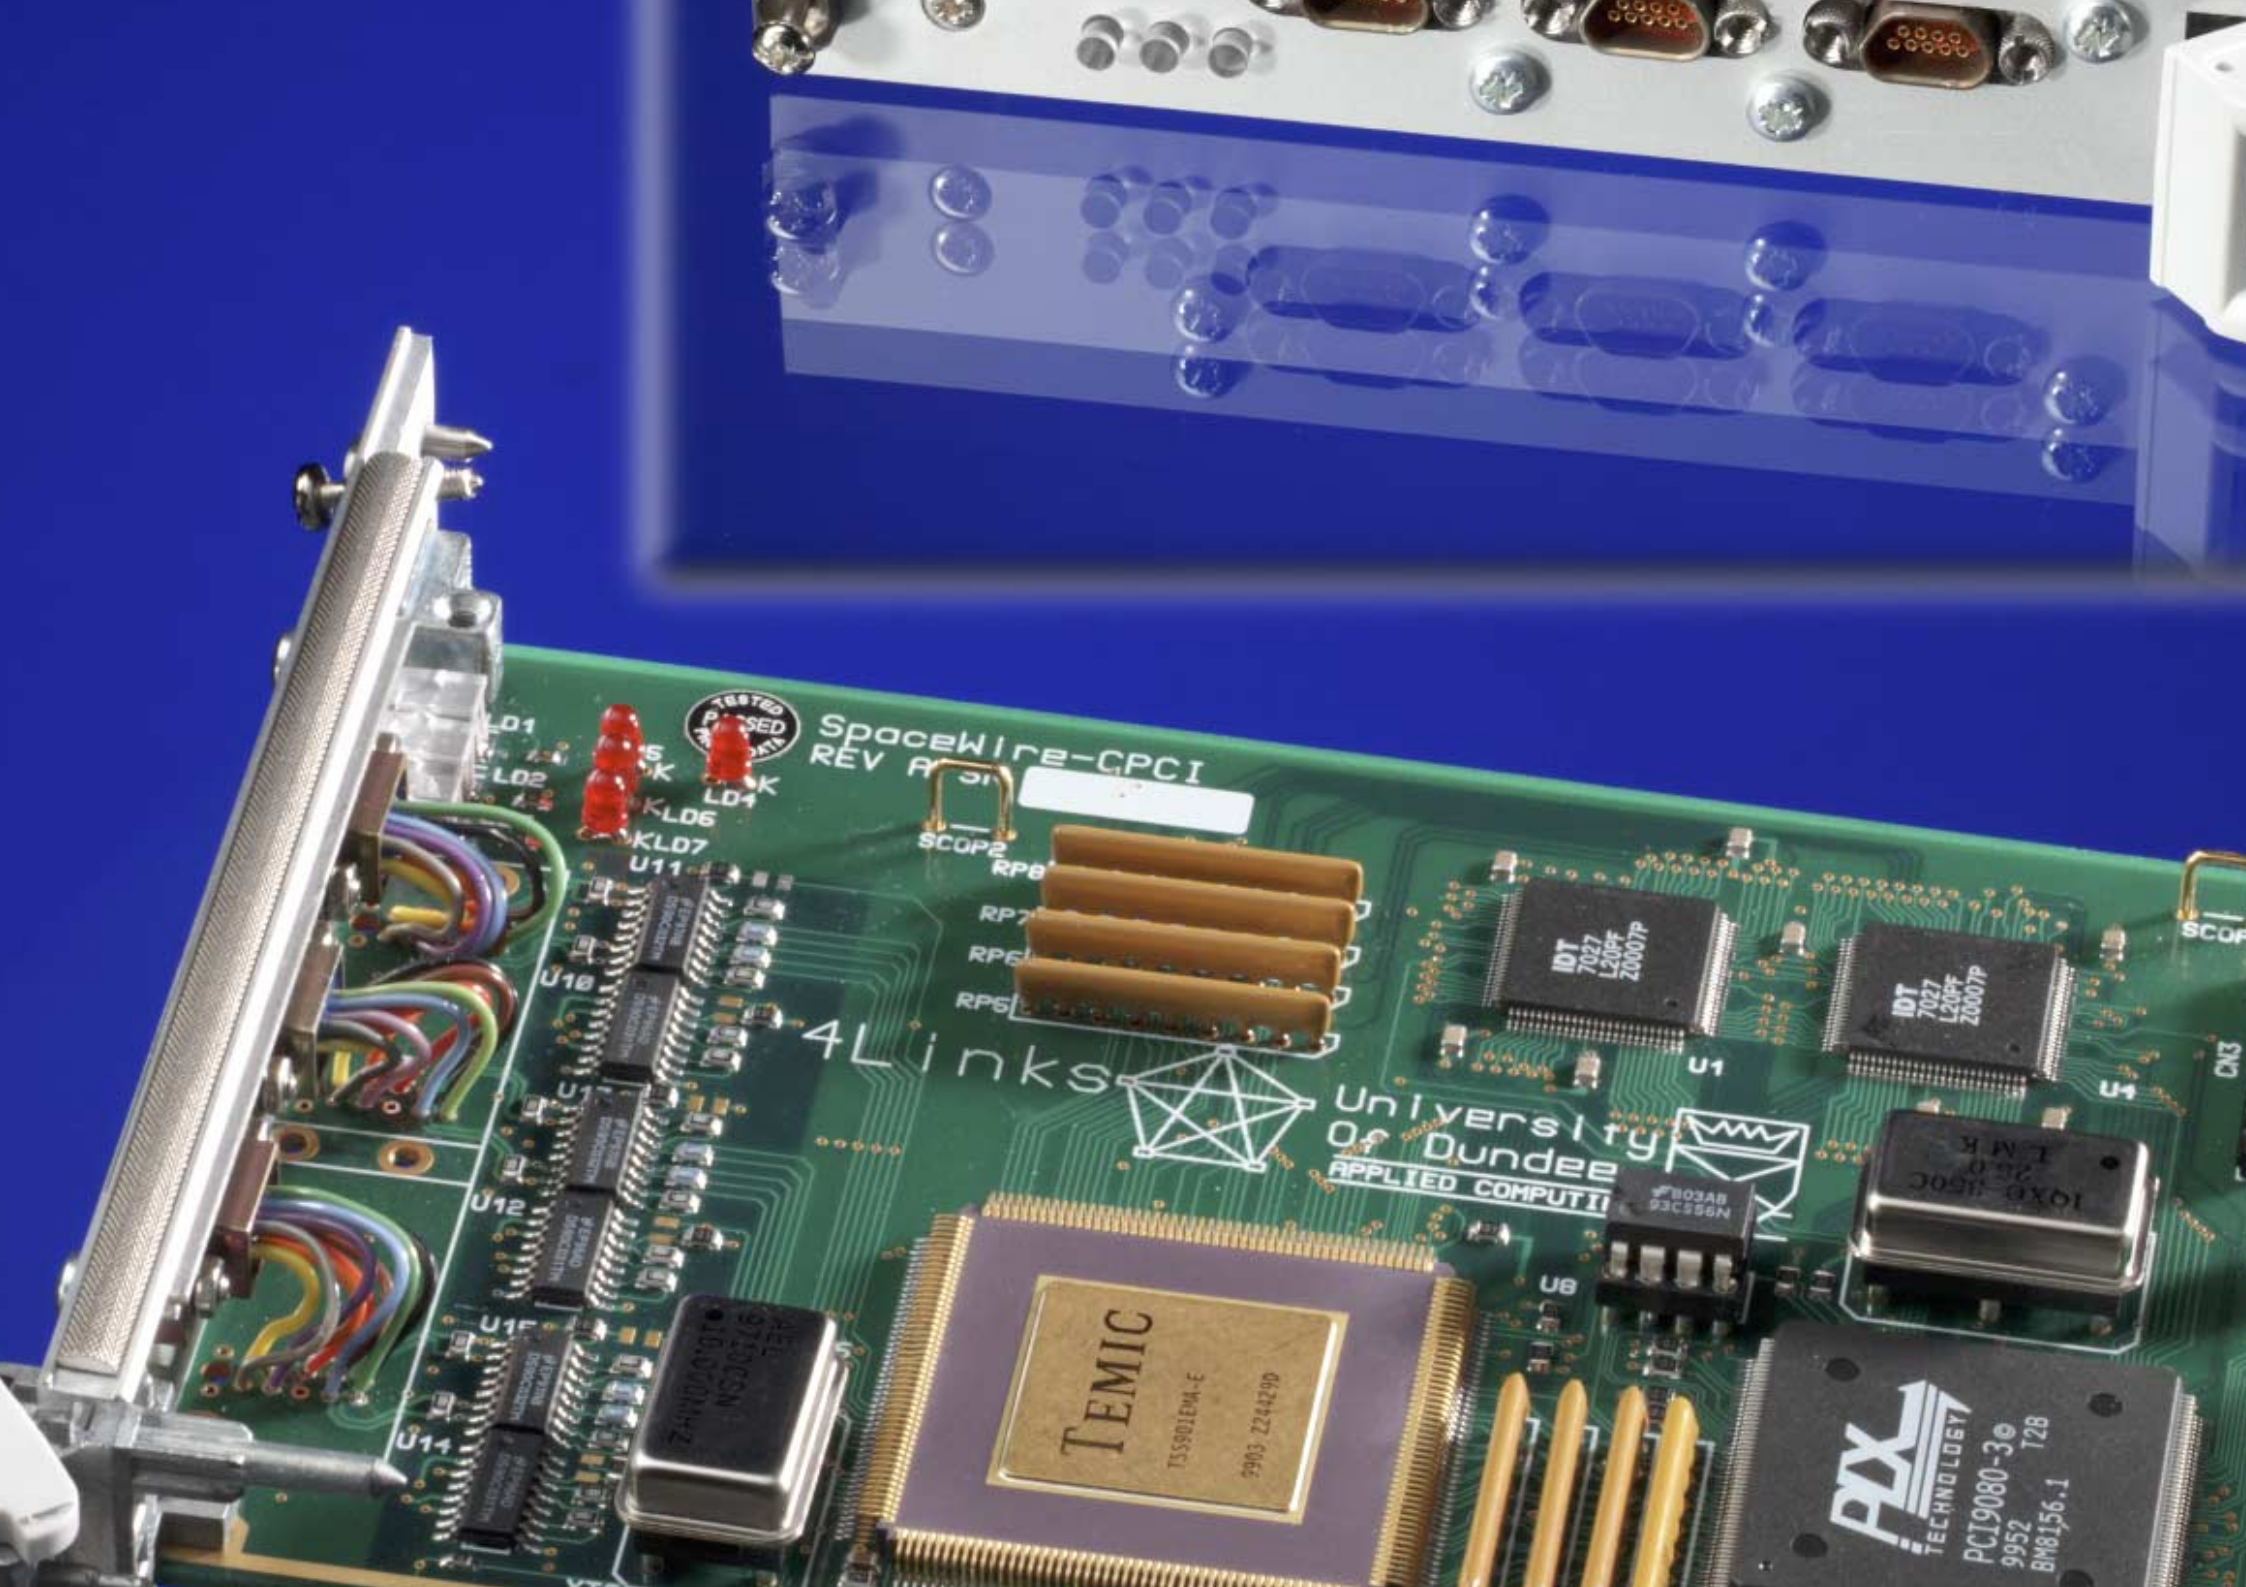

TESTED  
PASSED  
OK

SpaceWire-PCPCI  
REV A

4Links



University of Dundee  
APPLIED COMPUTING

TEMIC  
T3S001EVA-E  
2903 2244290



IDT  
7027  
L200PF  
Z0007P

IDT  
7027  
L200PF  
Z0007P

10X0-1850C  
LMK  
25.0

AAX  
TECHNOLOGY  
PCI9080-30  
9952 T28  
BW8156.1

- Routing switch
- Video interface
- Ethernet interface
- TCP/IP in hardware
- DMA interface

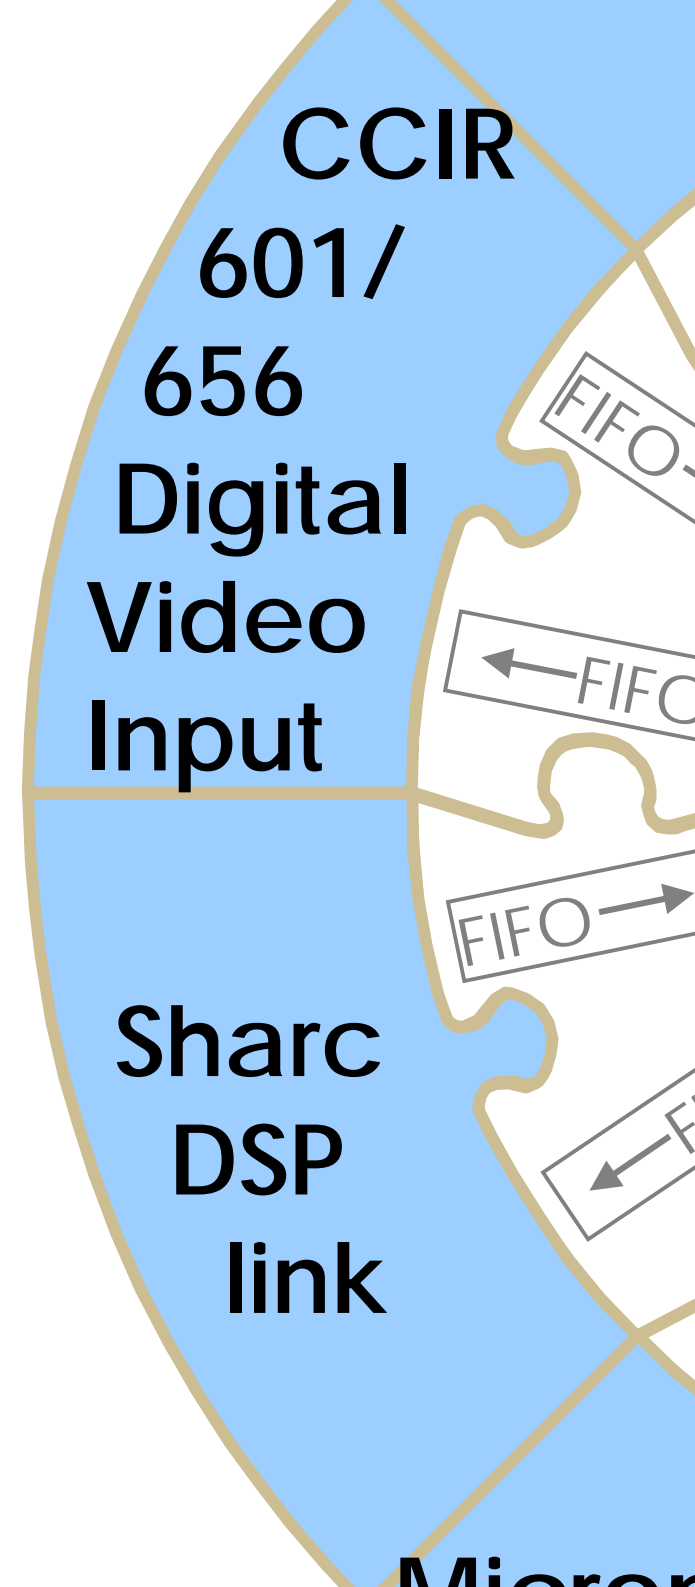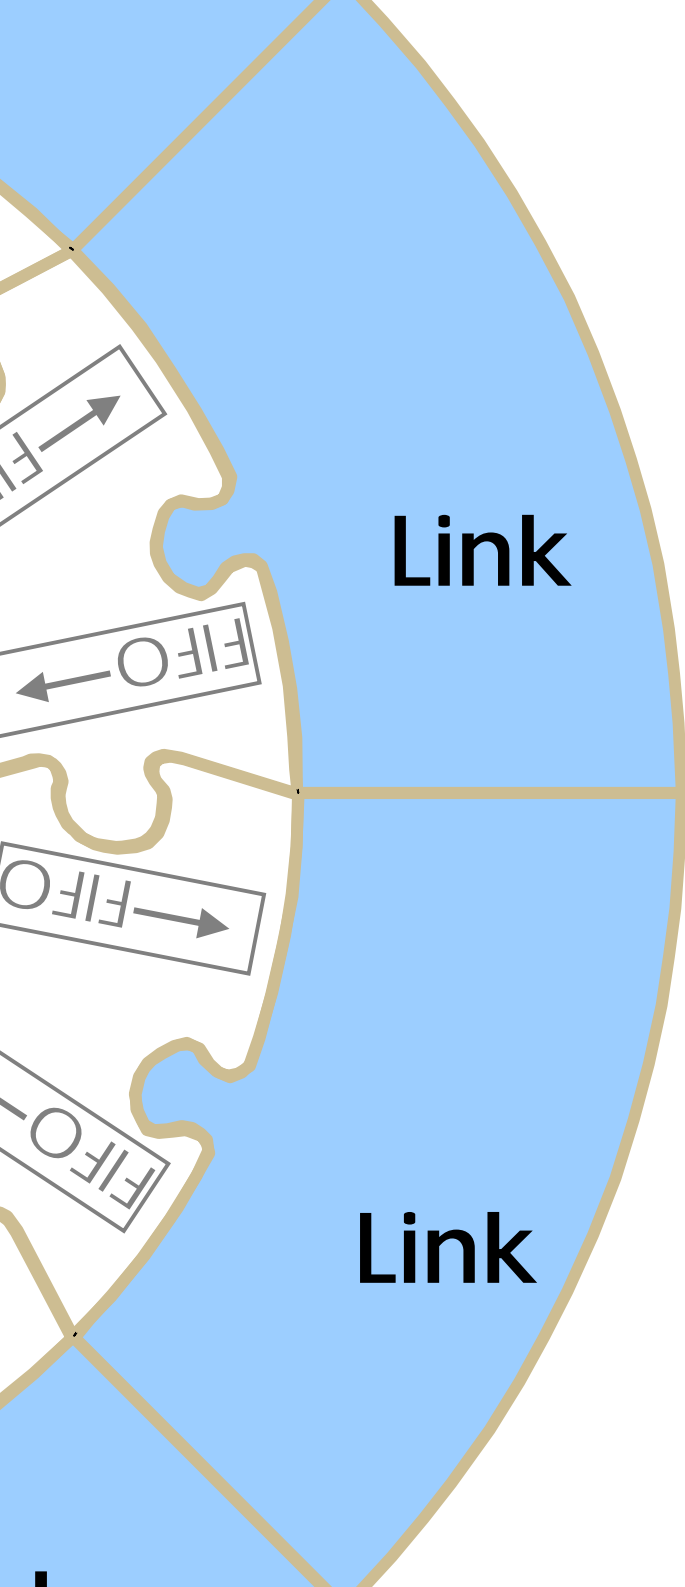

for IEEE 1000

old implementing IE

for SMCS/TSS901

d for SMCS/TSS901

ation of SpaceWire n

uncompressed video




tion

, OS

*SpaceWire*





Eth

8 09 0A FF [11798.205 636 2s] [EOP]

8 09 0A FF [11811.147 054 4s] [EOP]

F's received in Run state

veform

Report

Report

[1 363.

[1 365.

[1 367.

[1 369.

[1 371.

[1 373.

[1 375.

[1 377.

[1 379.

rol error: Too-many-FCT's received in Run state